



VENTO FLEX 125

Plug-in multideck chiller.



**PLUG AND CHILL.
THE »GREEN« EXPANSION
FOR YOUR STORE.**

THE FLEXIBLE ALL-INCLUSIVE MULTIDECK. STATE-OF-THE-ART ECONOMIC CHILLING.

The VENTO FLEX 125 by AHT generates fast and fresh revenue in the dairy and convenience segments. As simple to use as AHT chilling and freezing chests, with compact dimensions and a sealed and self-sufficient refrigeration system – its features give VENTO FLEX 125 a competitive edge in supermarkets, convenience stores or filling stations. Creates new sales potential in individual or extension placement. Maximum mobility, minimal effort, low energy consumption and investment cost. VENTO FLEX 125 is the closed multideck for »Plug and Chill« in an attractive shop format, using the environment-friendly refrigerant R290!

Your advantages

- | **Completely flexible, row-placeable plug-in modules (230 Volts)**
- | **Self-sufficient refrigeration system**
- | **Quick and easy to use the way you need to**
- | **No refrigeration installation; only power supply required**
- | **Low investment cost**
- | **Small footprint, easy to reposition**
- | **Complete freedom of arrangement at the POS**
- | **Compact and easy to move**
- | **Environment-friendly refrigerant propane R290**
- | **Can be placed individually or combined with existing VENTO systems**
- | **Double-insulated high-tech glass doors, only 14 mm thick and with a slender frame for optimal merchandise presentation**
- | **Fully automatic condensate evaporation**
- | **For convenience stores, supermarkets, filling stations etc.**



Efficient and economical

The AHT VENTO FLEX multideck guarantees ecological and economical chilling by using only the environment-friendly refrigerant R290. Perfect for extending existing installations or for placement at the POS. Due to the hermetically sealed refrigeration system, the leakage rate is 0 – meaning no refrigerant needs to be added. Ever.



Temperature ranges*

- | Dairy products +7 °C to –1 °C
- | Beverages +7 °C to –1 °C
- | Fruit and vegetables +10 °C to –1 °C

*Country- and operator-specific variations are possible

Accessories

- | **Panoramic side wall**
- | **Shelves**
- | **Shelf lighting**
- | **Scanner price rails**
- | **Bumpers, protection bars**
- | **Mirrored ceiling**
- | **Dividers:** steel sheet, wire or plastic
- | **Merchandise stoppers:** steel sheet, wire or plastic



Options

- | LED lighting
- | Non-reflecting glass
- | Connection to store monitoring system

Other multideck variants

VENTO AIR

- | Quick and easy setup without installation work

VENTO WATER


- | Efficient and environment-friendly waste heat discharge using water as medium; no refrigerant

VENTO HYBRID

- | Efficient waste heat discharge via air or water including automatic switching between modes

VENTO ROLL-IN

- | Extremely fast front-side loading with rolling containers and pallets

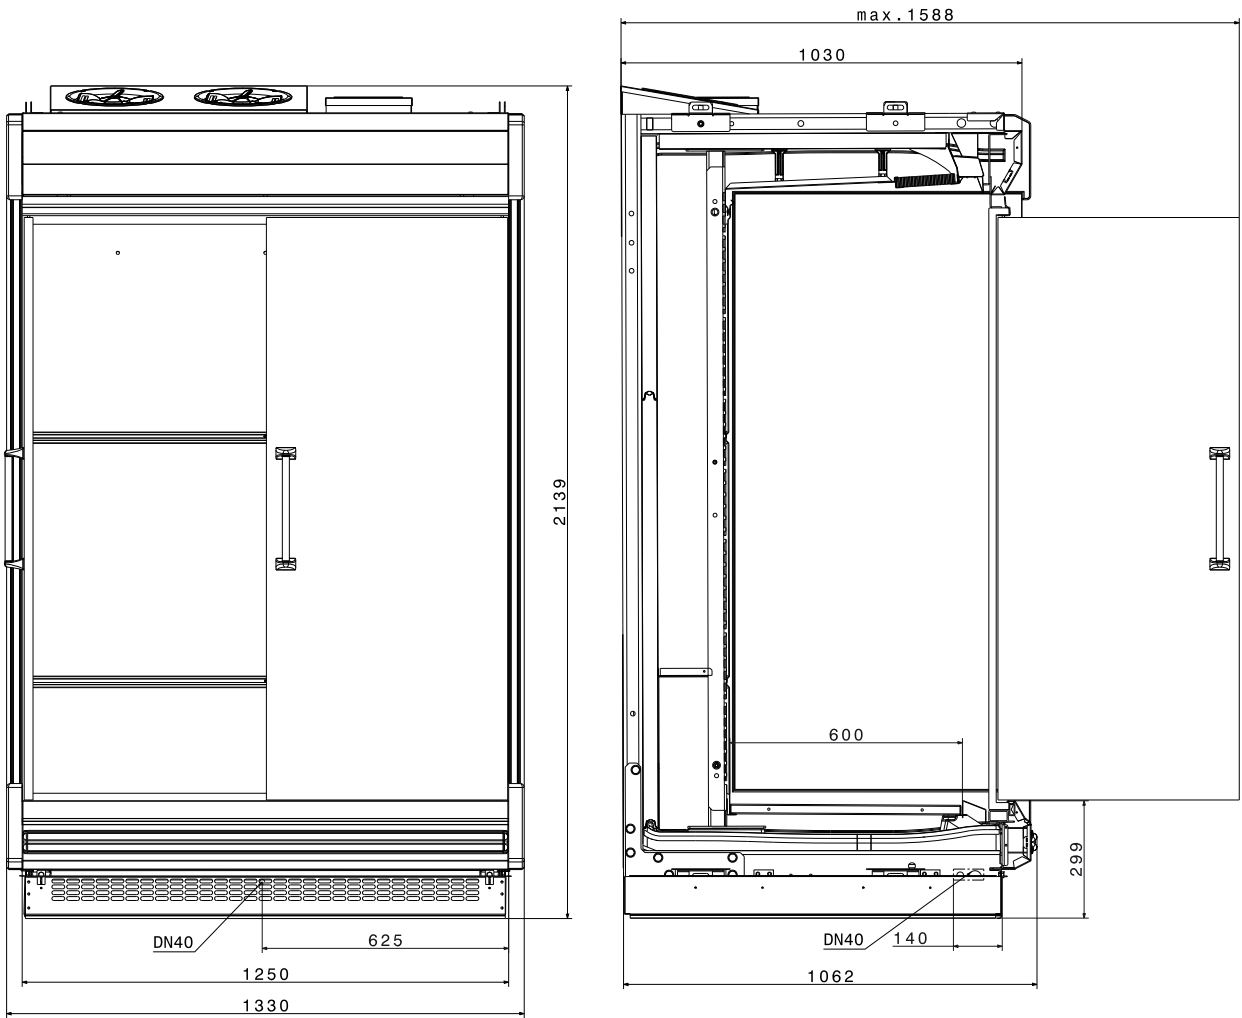

Shelf unit lengths

125 cm

Shelf heights

L – LOW 211 cm

H – HIGH 230 cm

Shelf depths

Inside: 60 cm, outside 106 cm



AHT Cooling Systems GmbH
 8786 Rottenmann · Austria
 Phone +43/(0)3614/2451-0
 Fax +43/(0)3614/2451-8
 Email office@aht.at

OHSAS 18001
 SA 8000

ISO 9001
 ISO 14001